

TRILUX 1.44 W



Ideal for
Boxes & Letters

Optimal Depth
2-12 inches

Module Consumption
1.44 Watts

High Brightness
140 Lumens

Beam Angle
160°

Number of modules
2 per foot

Waterproof
IP67


Long Life Span
50,000 Hours

Max. Load
35 Per 60W Power Supply

Great for Shallow Signs and Larger Cabinets !

Recommended Depth (inches)	2**	3	4	5	6	7	8	9	10 and up
Distance Between Rows (inches)*	3	4-5	6-7	8	10	12	12	10-12	8

* Measurements tested with acrylic face. May vary with thickness of material
** 3 modules/foot

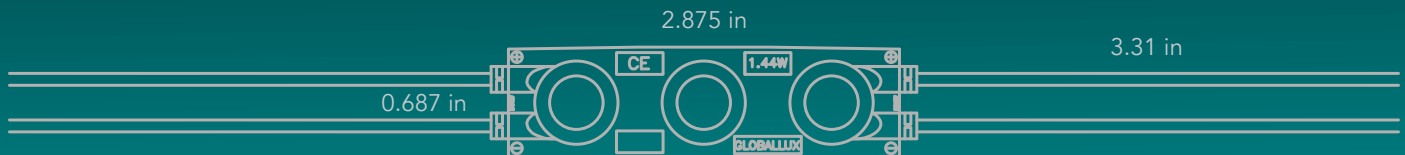

Product Code	Color	Lumens / Module	Watts / Module	Modules / Foot	Max. load for 60W 12V 5A, Class 2	Operating Temperature	Warranty	Waterproof Rating	Features
GL-EV5-14WET-160-CW	White 7200K	140	1.44W	2	35	-40° C to 70° C	5 years	IP 67	Constant Current

*Other colors available upon request.

