

# DELUXX 0.48W




- Ideal for**  
**A**  
Channel Letters
- Optimal Depth**  
**3-8**  
inches
- Module Consumption**  
**0.48**  
Watts
- High Brightness**  
**45**  
Lumens
- Beam Angle**  
**160°**
- Number of modules**  
**2**  
per foot
- Waterproof**  
**IP68**
- Long Life Span**  
**50,000**  
Hours
- Max. Load**  
**112**  
Per 60W  
Power Supply

Great for Shallow Signs!  
Dust and water resistant IP68 protection.

Recommended Depth (inches)	3	4	5	6	7	8
Distance Between Rows (inches)*	4-5	6-7	8	10	8-10	8

\* Measurements tested with acrylic face. May vary with thickness of material.

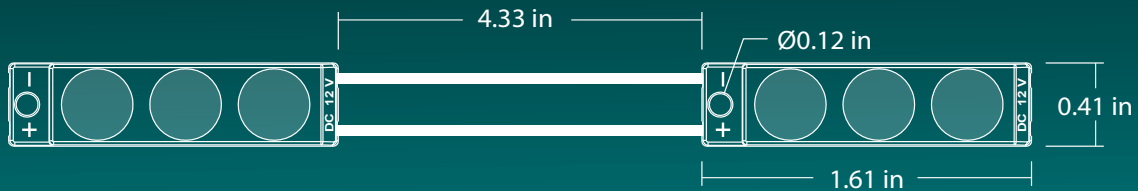

Product Code	Color	Lumens / Module	Watts / Module	Max. load for 60W 12V 5A, Class 2	Operating Temperature	Warranty	Waterproof Rating	Max Modules in Serie
GL-EV7-05W-160-74	White 7400K	45	0,48W	112	-40° C to 60° C	5 years	IP 68	50
GL-EV7-05W-160-R	RED	13	0,48W	112	-40° C to 60° C	5 years	IP 68	50
GL-EV7-05W-160-G	GREEN	32	0,48W	112	-40° C to 60° C	5 years	IP 68	50
GL-EV7-05W-160-B	BLUE	8	0,48W	112	-40° C to 60° C	5 years	IP 68	50

\*Other colors available upon request.

