

TRILUXX 1.2 W



Ideal for
A
Boxes & Letters

Optimal Depth
2-12
inches

Module Consumption
1.2
Watts

High Brightness
120
Lumens

Beam Angle
160°

Number of modules
2
per foot

Waterproof
IP67

Long Life Span
50,000
Hours


Max. Load
42
Per 60W
Power Supply

Great for Shallow Signs and Larger Cabinets !

Recommended Depth (inches)	2**	3	4	5	6	7	8	9	10 and up
Distance Between Rows (inches)*	3	4-5	6-7	8	10	10-12	10-12	8-10	8

* Measurements tested with acrylic face. May vary with thickness of material.

** 3 modules/foot

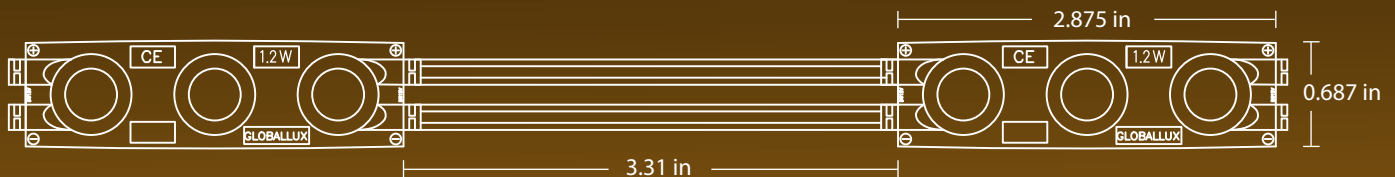

Product Code	Color	Lumens /Module	Watts /Module	Modules /Foot	Max. load for 60W 12V 5A, Class 2	Operating Temperature	Warranty	Waterproof Rating	Features
GL-EV5-12WET-160-CW	White 7200K	120	1.2W	2	42	-40° C to 70° C	5 years	IP 67	Constant Current
GL-EV5-12WET-160-DL	White 6500K	120	1.2W	2	42	-40° C to 70° C	5 years	IP 67	Constant Current
GL-EV5-12WET-160-WW	White 5000K	120	1.2W	2	42	-40° C to 70° C	5 years	IP 67	Constant Current

